




Features


- Less head, arm, flange, and spout Requires rough-in (3-VR) sold separately Solid brass construction


- Over 30 finishes including 15 PVD finishes

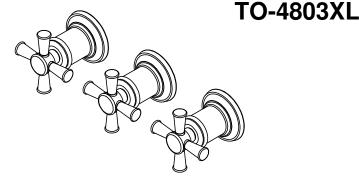

Codes/Standards

- Product meets or exceeds the following: ASME A112.18.1/CSA B125.1

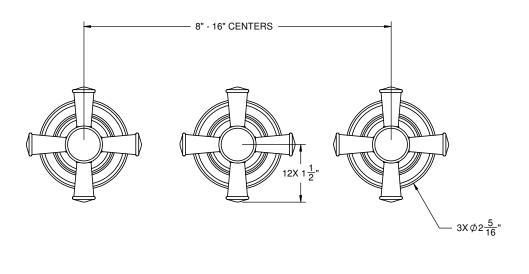



THRU HOLE SEPCIFICATIONS		
VALVE:	<u>MIN</u> Ø11/16"	RECOMMENDED 1-1/4"

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"