

Well Tanks, Floor - Blue

Product Specifications



PRODUCT FEATURES

- Stainless Steel Connection
- Heavy Duty Butyl Diaphragm
- Polypropylene Tank Liner
- Projection Welded Air Valve
- Water Inlet Agitator
- 5 Year Warranty



✓ To Submit	Part No.	Description	Size
	MLWF14	Floor Well Tank, Blue	14.0 gallon
	MLWF20	Floor Well Tank, Blue	20.0 gallon
	MLWF26	Floor Well Tank, Blue	26.0 gallon
	MLWF32	Floor Well Tank, Blue	32.0 gallon
	MLWF34	Floor Well Tank, Blue	34.0 gallon
	MLWF44	Floor Well Tank, Blue	44.0 gallon
	MLWF62	Floor Well Tank, Blue	62.0 gallon
	MLWF81	Floor Well Tank, Blue	81.0 gallon
	MLWF86	Short Floor Well Tank, Blue	86.0 gallon
	MLWF119	Floor Well Tank, Blue	119.0 gallon

Warranty: See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Contact your sales representative for more information or visit our website at mainlinecollection.com

Well Tanks, Floor - Blue

Product Specifications




Part	Lit	Gal	Max Accept Factor	A Height		B Diameter		C Conn.	Sys Conn. (NPTF)	Factory Pre-charge	Working Pressure	Ship Wt.	
				Mm	Ins	Mm	Ins	Ins	Ins	PSIG	PSIG	Kg	lbs
MLWF14	53	14.0	0.81	635	25	381	15	1-19/32	1	38	125	10.0	22
MLWF20	76	20.0	0.57	813	32	381	15	1-19/32	1	38	125	12.7	28
MLWF26	98	26.0	0.44	991	39	381	15	1-19/32	1	38	125	15.4	34
MLWF32	121	32.0	0.35	1194	47	381	15	1-19/32	1	38	125	18.1	40
MLWF34	129	34.0	1.00	762	30	559	22	1-15/16	1-1/4	38	125	22.7	50
MLWF44	167	44.0	0.77	914	36	559	22	1-15/16	1-1/4	38	125	25.9	57
MLWF62	235	62.0	0.55	1194	47	559	22	1-15/16	1-1/4	38	125	34.0	75
MLWF81	301	81.0	0.41	1448	57	559	22	1-15/16	1-1/4	38	125	41.7	92
MLWF86	326	86.0	0.54	1194	47	660	26	2-1/16	1-1/4	38	125	44.9	99
MLWF119	450	119.0	0.39	1575	62	660	26	2-1/16	1-1/4	38	125	60.3	133

All dimensions and weights are approximate

SPECIFICATIONS

Description	Shell	Diaphragm	Liner	Coating
Diaphragm Construction	Deep Drawn Steel	Heavy Duty Butyl	Polypropylene	2-Part Urethane

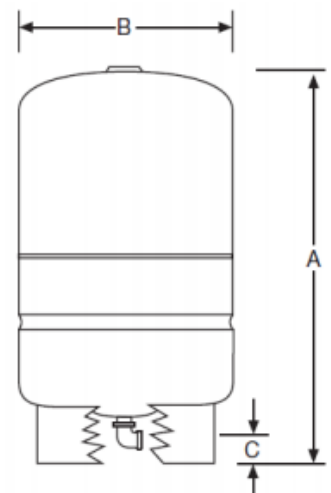

MAX OPERATING CONDITIONS

Operating Temperature	Working Pressure
200°F (93°C)	125 PSIG (861.8kPa)

Complies with Low Lead Plumbing Law



Warranty: See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

Contact your sales representative for more information or visit our website at mainlinecollection.com