

# Hydronic Expansion Tanks, Inline

## Product Specifications



**MAINLINE**

### PRODUCT FEATURES

- For use in Closed, Non-Potable, Hydronic Heating Systems
- Stainless Steel Connection
- Heavy Duty Butyl Diaphragm
- Polypropylene Tank Liner
- Projection Welded Air Valve



✓ To Submit	Part No.	Description	Size
	MLEX15	In-Line Hydronic Expansion Tank, 5 Year Warranty	2.0 gallon
	MLEX30	In-Line Hydronic Expansion Tank, 5 Year Warranty	4.4 gallon
	MLEX60	In-Line Hydronic Expansion Tank, 5 Year Warranty	7.6 gallon
	MLEX90	In-Line Hydronic Expansion Tank, 5 Year Warranty	14.0 gallon

**Warranty:** See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



**Contact your sales representative for more information or visit our website at [mainlinecollection.com](http://mainlinecollection.com)**

# Hydronic Expansion Tanks, Inline

## Product Specifications




**MAINLINE**

Part	Tank Volume		Acceptance Volume		A Height		B Diameter		Sys Conn. (NPTM)	Ship Wt.	
	Liters	Gallons	Liters	Gallons	Mm	ins	Mm	Ins	Ins	Kg	Lbs
MLEX15	8	2.0	3.4	0.9	330	13	203	8	1/2	2.3	5
MLEX30	17	4.4	9.5	2.5	406	16	279	11	1/2	4.0	9
MLEX60	33	7.6	9.5	2.5	584	23	279	11	1/2	6.4	14
MLEX90	53	14.0	42.0	11.3	533	21	390	15	1/2	10.4	23

All dimensions and weights are approximate

### SPECIFICATIONS

Description	Shell	Diaphragm	Factory Precharge
Standard Construction	Steel	Heavy Duty Butyl/EPDM	12 PSIG (.82 bar)

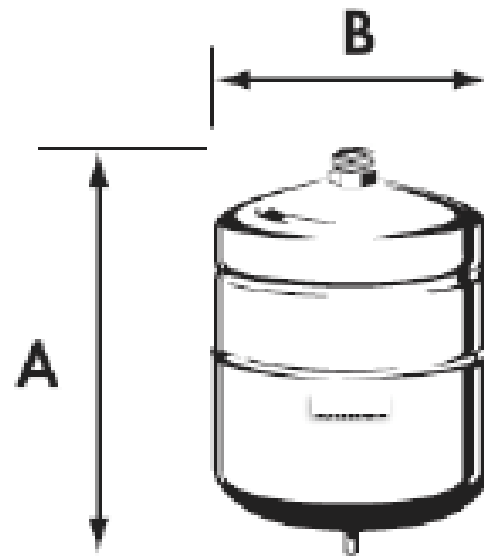

### MAX OPERATING CONDITIONS

Operating Temperature	Working Pressure
240°F (115.6°C)	100 PSIG (6.9 bar)

Complies with Low Lead Plumbing Law



**Warranty:** See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

Contact your sales representative for more information or visit our website at [mainlinecollection.com](http://mainlinecollection.com)

Revised 4-2016